

CD 2000®

Wall and Roof Panel



A traditional panel engineered to last for decades

CD 2000® is a proven choice for roofing and siding applications. The board-and-batten appearance provides both an attractive and cost effective option for a wide variety of agricultural, recreational, and light commercial uses.

CD 2000® is available in our proven CentralGuard® paint system.


- Wide fastening surfaces, making fastening easier and faster.
- Siphon groove prevents capillary action and stays watertight.
- Matching trims and accessories are available.



RECOMMENDED 3:12 PITCH AND ABOVE	29 OR 26 GAUGE	36" OVERALL COVERAGE	5/8" MAXIMUM RIB HEIGHT
--	---------------------------------------	-----------------------------------	--------------------------------------



WWW.CENTRALSTATESMFG.COM

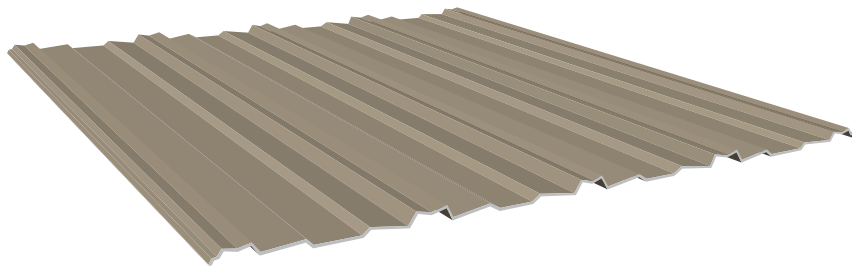

Choose a *panel quality* that works best for your project and budget.

For a small amount more upgrade to

Ultra
26 Gauge

Prime*
29 Gauge

Thrifty
29 Gauge

PREMIUM OPTION

The industry leader

Least expensive option

CENTRALGUARD® PROTECTION

Yes

Yes

No

FADE RESISTANCE

40%
More Resistance Than Thrifty

40%
More Resistance Than Thrifty

Basic Resistance

DENT RESISTANCE

223%
More Resistance Than Thrifty

40%
More Resistance Than Thrifty

Basic Resistance

RUST RESISTANCE

135%
More Coating Than Thrifty

135%
More Coating Than Thrifty

Basic Coating

WARRANTY

20 Year Rust-Through
30 Year Chalk & Fade
40 Year Paint Adhesion

20 Year Rust-Through**
30 Year Chalk & Fade
40 Year Paint Adhesion

NO Rust-Through
NO Chalk & Fade
20 Year Paint Adhesion

CentralGuard® is an advanced system engineered by Central States®, to protect our metal against fade, dent, and rust.



MINIMUM SPECIFICATIONS ULTRA AND PRIME

GAUGE

Ultra 26ga | Prime 29ga

STEEL THICKNESS

Ultra 0.0185" | Prime 0.0150"

PAINT THICKNESS

Top coat paint: .70 mils
Top coat primer: .20 mils
Bottom coat backer: .35 mils
Bottom coat primer: .35 mils

TOTAL THICKNESS

Ultra 0.0202" | Prime 0.0167"

RUST PROTECTANT SUBSTRATE

Galvalume® AZ55, acrylic bare
Galvalume® AZ50, painted
Galvanized G90, painted

STEEL STRENGTH

80,000 PSI min

PAINT SYSTEM

CentralGuard®, powered by Valspar®

WARRANTY

40 yr paint adhesion
30 yr chalk and fade
20 yr Galvalume® perforation warranty**

For more information visit
www.AllMetalNotEqual.com

* Prime is available in painted AZ50 or painted G90

** 20 yr perforation warranty not available on Galvanized G90, painted