

Horizon-Loc™

Concealed Fastener Roof Panel



Horizon-Loc™ *prevents leaks* with its hidden fastener design

Horizon-Loc™ allows you to have a beautiful roof without a single screw showing, giving you the advantage of a standing seam roof for less. The panel snaps on easy to rapidly attach with no hand seaming, so installation is less expensive than traditional standing seam. It is ideal for residential roofing and light commercial applications applied over solid decking, and its durability ratings may lower insurance rates to save you money.

- Installs over solid decking with 30lb. felt paper or equivalent.
- Available in painted AZ50 Galvalume® or AZ55 acrylic coated Galvalume®.
- Matching trims and accessories in both hidden or exposed fastener style.



RECOMMENDED
3:12
PITCH
AND ABOVE

26
GAUGE

16"
OVERALL
COVERAGE


1"
MAXIMUM
RIB HEIGHT



WWW.CENTRALSTATESMFG.COM

Copyright © 2016, Central States Manufacturing, Inc., All Rights Reserved.
Galvalume® is a registered trademark of BIEC International, Inc.

 FLYR_HLOC_160212

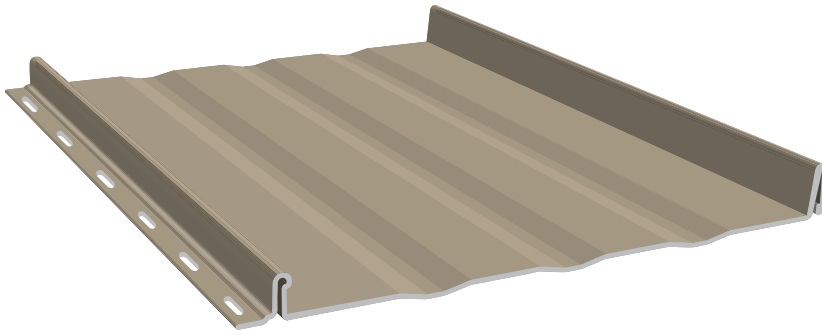

Upgrade to Horizon-Loc™ for the beauty and protection of a standing seam panel.

	Horizon-Loc™ 26 Gauge	Panel-Loc Plus™ 29 Gauge Prime	Panel-Loc Plus™ 29 Gauge Thrifty
	PREMIUM OPTION		
CENTRALGUARD® PROTECTION	Yes	Yes	No
AESTHETIC APPEARANCE	Standing Seam	Traditional	Traditional
LEAK PREVENTION	Screws Hidden From Rain & Snow	Screws Exposed To Rain & Snow	Screws Exposed To Rain & Snow
WARRANTY	20 Year Rust-Through 30 Year Chalk & Fade 40 Year Paint Adhesion	20 Year Rust-Through 30 Year Chalk & Fade 40 Year Paint Adhesion	NO Rust-Through NO Chalk & Fade 20 Year Paint Adhesion

CentralGuard® is an advanced system engineered by Central States®, to protect our metal against fade, dent, and rust.



For more information visit
www.AllMetalNotEqual.com

SPECIFICATIONS

GAUGE
26ga

STEEL THICKNESS
0.0185"

PAINT THICKNESS
Top coat paint: .80 mils
Top coat primer: .20 mils
Bottom coat backer: .35 mils
Bottom coat primer: .35 mils

TOTAL THICKNESS
0.0202"

RUST PROTECTANT SUBSTRATE
Galvalume® AZ55, acrylic bare
Galvalume® AZ50, painted

STEEL STRENGTH
50,000 PSI min

PAINT SYSTEM
CentralGuard®, powered by Valspar®

WARRANTY
40 yr paint adhesion
30 yr chalk and fade
20 yr Galvalume® perforation warranty

TESTING & APPROVALS

TESTING
TAS 125-03 Uplift Resistance Test, 26 gauge
UL580 Uplift Resistance Test, 26 gauge
UL2218 Impact Resistance Test, 26 gauge

APPROVALS
UL2218 UL Approval, Impact Resistance (Metal Forming Test)
UL580 UL Approval, Uplift Resistance
UL790 UL Approval, Fire Resistance, Class A
RC-423 Texas Windstorm Approval, 26 gauge over 1/2" thick plywood
FL14026.1 Florida Approval, Roof Panel over Solid Decking (NON-HVHZ)

CentralGuard® is a trademark of Central States® Manufacturing, Inc.