

M-Loc™


Commercial and Residential Roof and Wall Panel



An *attractive* and *reliable* all-purpose panel

This versatile panel has long served customers with lasting durability and a pleasing appearance. Its sturdy design provides resistance to the most severe weather and is an excellent choice when the project requires a commercial strength panel with a low rib appearance.

- M-Loc™ is a structural roof and wall panel that can be installed directly over purlins or joists.
- This panel is produced in our Cedar Hill, TX and Mount Airy, NC facilities. Longer lead times may apply.




RECOMMENDED 1:12 PITCH AND ABOVE	26 GAUGE	36" OVERALL COVERAGE	13/16" MAXIMUM RIB HEIGHT
--	--------------------	-----------------------------------	--



WWW.CENTRALSTATESMFG.COM

Copyright © 2016, Central States Manufacturing, Inc., All Rights Reserved.
Galvalume® is a registered trademark of BIEC International, Inc.

FLYR_MLOC_161130

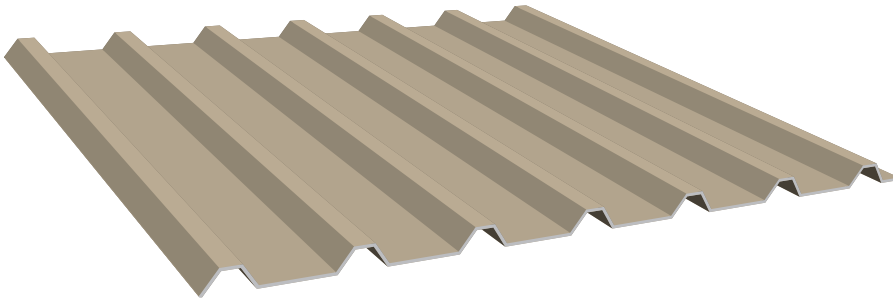

Choose a *panel quality* that works best for your project and budget.

	Prime 26 Gauge INDUSTRY LEADER	Thrifty 26 Gauge Least expensive option
CENTRALGUARD® PROTECTION	Yes	No
PURLIN BEARING LEG	Yes	No
FADE RESISTANCE	40% More Resistance Than Thrifty	Basic Resistance
DENT RESISTANCE	40% More Resistance Than Thrifty	Basic Resistance
RUST RESISTANCE	135% More Coating than Thrifty	Basic Coating
WARRANTY	20 Year Rust-Through 30 Year Chalk & Fade 40 Year Paint Adhesion	NO Rust-Through NO Chalk & Fade 20 Year Paint Adhesion



MINIMUM SPECIFICATIONS PRIME

GAUGE

26ga | 24ga*

STEEL THICKNESS

26ga 0.0185" | 24ga 0.023"

PAINT THICKNESS

Top coat paint: .70 mils
 Top coat primer: .20 mils
 Bottom coat backer: .35 mils
 Bottom coat primer: .35 mils

TOTAL THICKNESS

26ga 0.0202" | 24ga .0247"

RUST PROTECTANT SUBSTRATE

Galvalume® AZ55, acrylic bare
 Galvalume® AZ50, painted

STEEL STRENGTH

80,000 PSI (26ga) | 50,000 PSI (24ga)

PAINT SYSTEM

CentralGuard®, powered by Valspar®

WARRANTY

40 yr paint adhesion
 30 yr chalk and fade
 20 yr Galvalume® perforation warranty

TESTING AND APPROVALS

APPROVALS

UL2218 UL Approval, Impact Resistance, Class 4
 UL580 UL Approval, Uplift Resistance, Class 90
 UL790 UL Approval, Fire Resistance, Class A
 RC-445 Texas Windstorm Approval, 26 gauge over steel purlins

* 24ga available in Polar and Galvalume, acrylic bare in select plants

For more information visit
www.AllMetalNotEqual.com

CentralGuard® is an advanced system engineered by Central States® to protect our metal against fade, dent and rust, and is a trademark of Central States® Manufacturing, Inc.