

# Panel-Loc™

Wall and Roof Panel



## The classic panel for post frame barns and buildings

The classic appearance of Panel-Loc™ gives agricultural and light commercial projects, as well as residential roofs, the protection of steel with an attractive appearance. Panel-Loc™ is engineered with CentralGuard® protection against fade, dent and rust. Available in 26 and 29 gauge metal panels, Panel-Loc™ is a reliable low rib metal building panel.

- Employs a drain channel that guards against wind, rain, and snow; minimizing leaks.
- Customers may experience longer lead times as this panel is only produced in our Lowell, AR facility.




RECOMMENDED <b>3:12</b> PITCH AND ABOVE	<b>29</b> OR <b>26</b> GAUGE	<b>36"</b> OVERALL COVERAGE	<b>5/8"</b> MAXIMUM RIB HEIGHT
--	---------------------------------------	-----------------------------------	--------------------------------------



[WWW.CENTRALSTATESMFG.COM](http://WWW.CENTRALSTATESMFG.COM)

Copyright © 2016, Central States Manufacturing, Inc., All Rights Reserved.  
Galvalume® is a registered trademark of BIEC International, Inc.

FLYR\_PL\_160525

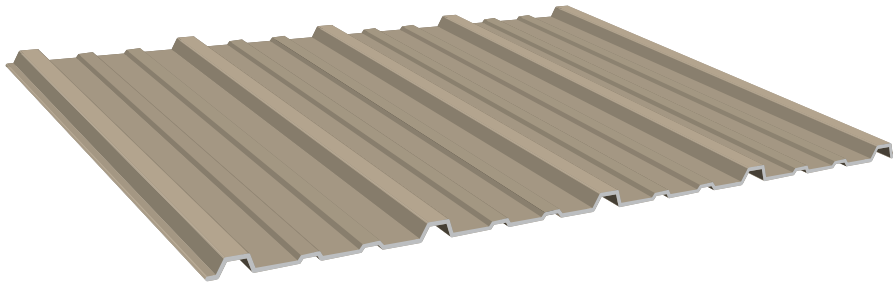

Choose a *panel quality* that works best for your project and budget.

For a small amount more upgrade to

**Ultra**  
26 Gauge

**Prime**  
29 Gauge

**Thrifty**  
29 Gauge

**PREMIUM OPTION**

The industry leader

Least expensive option

CENTRALGUARD® PROTECTION

**Yes**

**Yes**

**No**

FADE RESISTANCE

**40%**  
More Resistance than Thrifty

**40%**  
More Resistance than Thrifty

Basic Resistance

DENT RESISTANCE

**223%**  
More Resistance than Thrifty

**40%**  
More Resistance than Thrifty

Basic Resistance

RUST RESISTANCE

**135%**  
More Coating than Thrifty

**135%**  
More Coating than Thrifty

Basic Coating


WARRANTY

**20** Year Rust-Through  
**30** Year Chalk & Fade  
**40** Year Paint Adhesion

**20** Year Rust-Through  
**30** Year Chalk & Fade  
**40** Year Paint Adhesion

**NO** Rust-Through  
**NO** Chalk & Fade  
**20** Year Paint Adhesion

CentralGuard® is an advanced system engineered by Central States® to protect our metal against fade, dent, and rust.



## MINIMUM SPECIFICATIONS ULTRA AND PRIME

### GAUGE

Ultra 26ga | Prime 29ga

### STEEL THICKNESS

Ultra 0.0185" | Prime 0.0150"

### PAINT THICKNESS

Top coat paint: .70-.80 mils  
Top coat primer: .20 mils  
Bottom coat backer: .35 mils  
Bottom coat primer: .35 mils

### TOTAL THICKNESS

Ultra 0.0202" | Prime 0.0167"

### RUST PROTECTANT SUBSTRATE

Galvalume® AZ55, acrylic bare  
Galvalume® AZ50, painted

### STEEL STRENGTH

80,000 PSI min

### PAINT SYSTEM

CentralGuard®, powered by Valspar®

### WARRANTY

40 yr paint adhesion  
30 yr chalk and fade  
20 yr Galvalume® perforation warranty

## TESTING AND APPROVALS

### APPROVALS

UL580 UL Approval, Uplift Resistance, Class 90  
UL2218 UL Approval, Impact Resistance, Class 4  
UL790 UL Approval, Fire Resistance, Class A

For more information visit  
[www.AllMetalNotEqual.com](http://www.AllMetalNotEqual.com)

CentralGuard® is a trademark of Central States® Manufacturing, Inc.